



HOSHIZAKI



> **FM-600AKE**

flake ice

daily ice production capacity of up to 600kg



> **FM-600AKE-N**

nugget ice

daily ice production capacity of up to 530kg




> **FM-600AKE**
(With Hoshizaki Storage Bin - **B-301SA**)

Aside for drinks, ice is important for preservation purposes. Hoshizaki's FM ice machines produce flakes consisting of 70% ice and 30% water, used primarily for cooling purposes and has no 'freeze-burn' effect when displaying fresh produce. It is also used in large facilities such as healthcare, catering, supermarket chains or even cocktail bars.


FLAKE ICE MAKER SERIES

FEATURES

- > carbon auger bearings enhances product life expectancy, reduces maintenance cost
- > hydrocarbon refrigerants lowers energy consumption
- > 100% hfc free co2 foam insulation maintains consistent temperature
- > smart computer board technology
- > stainless steel exterior
- > led error indicator for easy diagnosis

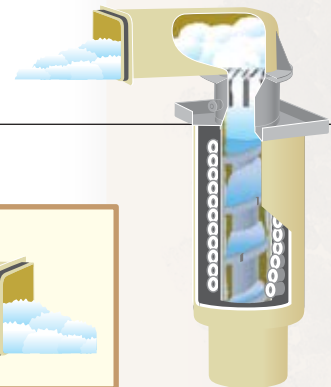


UNIQUE ICE PRODUCTION SYSTEM

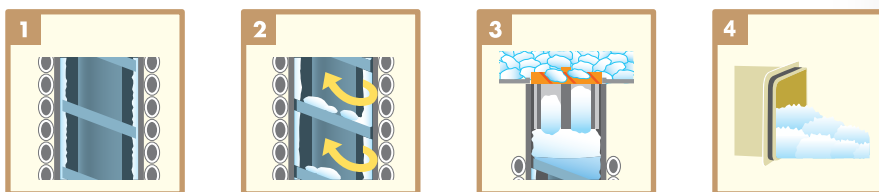


DIMENSIONS & SPECIFICATION

FLAKE ICE MAKER AIR SYSTEM

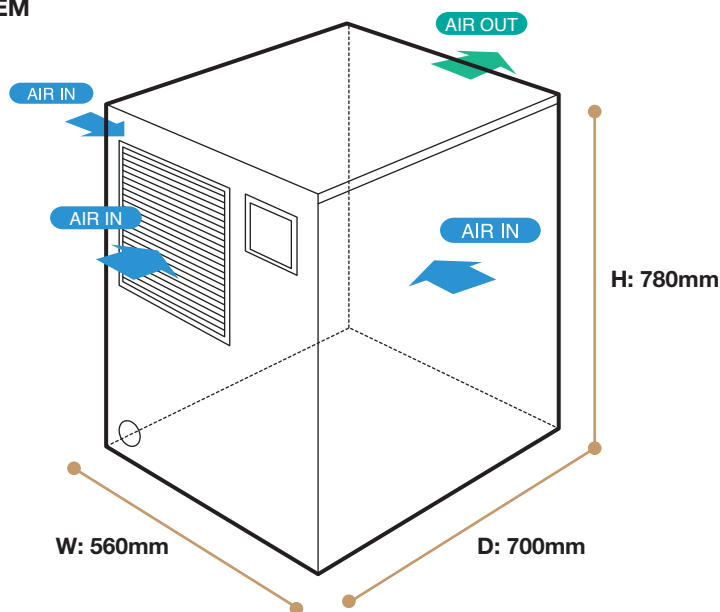

BACK VIEW

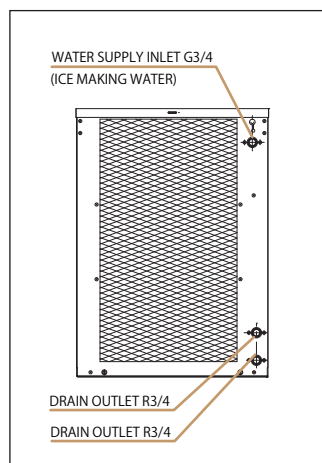

MODEL NAME	FM-600AKE	FM-600AKE-N
ICE SHAPE	Flake	Nugget
DIMENSIONS (MM) (W x D x H)	560 x 700 x 780	
PACKED DIMENSIONS (MM) (W x D x H)	671 x 820 x 971	
WEIGHT (NETT/GROSS)	107 KG / 114 KG	
AMPERAGE / STARTING AMPERAGE	10.5A / 76A	10.8A / 76A
ELECTRICAL CONSUMPTION	1900 W	1950 W
REFRIGERANT CHARGE	R404a	
HEAT REJECTION	3950 W (3396 kcal/h)	3700 W (3181 kcal/h)
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	600 KG
	(AT21°C/WT15°C)	540 KG
	(AT32°C/WT21°C)	445 KG
WATER CONSUMPTION PER 24H (AT21°C/WT15°C)	0.57 m ³	0.49 m ³
	1L / 1KG ICE	1L / 1KG ICE

WARRANTY:

Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages

OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C
• Water Supply: 5°-35°C / 0.05-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz