HOSHIZAKI

CUBE ICE MAKER SERIES

> **IM-95TM-1**
> **IM-95TM-1-21**
> **Daily ice production capacity up to 92KG**

Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer, The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

FEATURES

> smart computer board technology
> slide-in air filter for easy cleaning
> LED error indicator for easy diagnosis
> stainless steel exterior provides a hygienic and high quality finish

UNIQUE ICE PRODUCTION SYSTEM

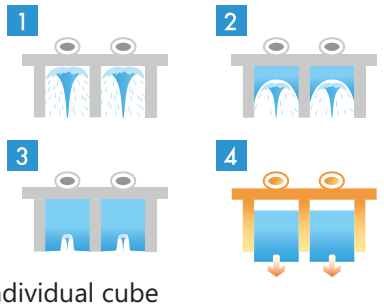

> Individual cube
> Impurity free
> Hardest ice to enjoy slow melting and dilution of drinks

ICE SIZE





ISO CE Tropical Conditions

DIMENSIONS & SPECIFICATION

TOP SIDE

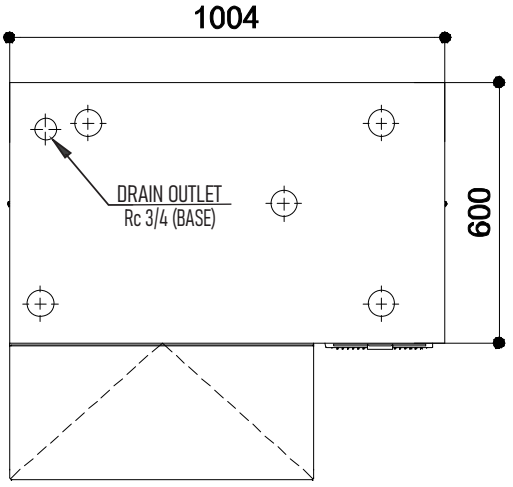

BACK SIDE

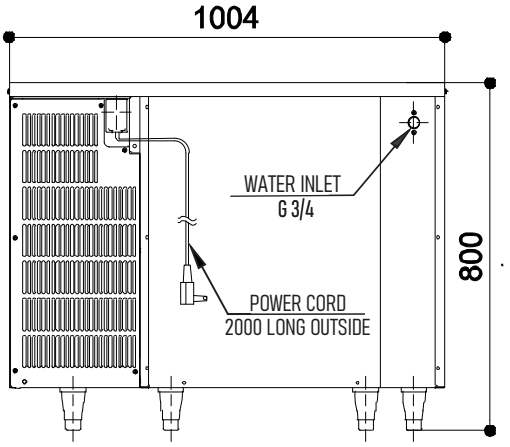

FRONT SIDE

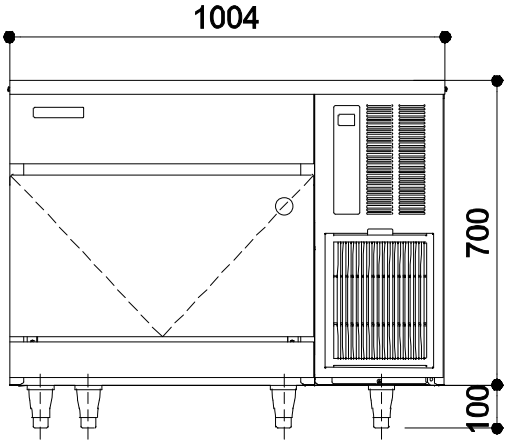

RIGHT SIDE

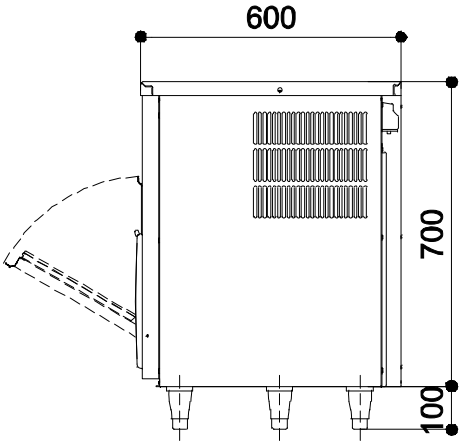

MODEL NAME		IM-95TM-1	IM-95TM-1-21	
ICE DIMENSIONS (MM) (W x D x H)		28 x 28 x 32	21 x 21 x 14	
DIMENSIONS (MM) (W x D x H)		Body:1004 x 600 x 800 / Leg Height : 90-125 mm		
PACKED DIMENSIONS (MM) (W x D x H)		1110 x 700 x 875		
WEIGHT (NETT/GROSS)		77KG / 88KG		
AMPERAGE / STARTING AMPERAGE		4.1A / 19A		
ELECTRICAL CONSUMPTION		630 W		
REFRIGERANT CHARGE		R134a		
HEAT REJECTION (AT32°C/WT21°C)		1180 W(1015 kcal/h)		
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	95 KG	92 KG (7mm)	
	(AT21°C/WT15°C)	93 KG	87 KG (7mm)	
	(AT32°C/WT21°C)	84 KG	64 KG (7mm)	
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)		0.18 m^3	0.23 m^3	
		2.14L / 1KG ICE	3.59L / 1KG ICE	
ICE PRODUCTION (AT32°C/WT21°C)	FREEZE CYCLE TIME	36.5 MIN	26 MIN	
	PER CYCLE	1.8 KG / 80 PCS	1.15 KG /190 PCS	
STORAGE CAPACITY		38 KG		

OPERATING CONDITIONS: • *Voltage Range: 198V-254V* • *Ambient Temperature: 1°-40°C*
• *Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI* • *AC Supply Voltage: 1/220-240V / 50 Hz*
60Hz units are available upon request

R1

We reserve the right to make changes in specification and design without prior notice.