HOSHIZAKI

HACCP

ISO9001

CHILLER

RT-158MC-S-ML

PILLARLESS

Key Features

- **Self-Evaporating Design**
- **Pillarless Design**
- **R290 Natural Refrigerant**
- **Door Switch**

Our A-Fit cabinet combines functionality and outstanding energy performance to meet Japanese quality standards, with precise temperature control to ensure food-ingredient freshness at all times. With the R290 natural refrigerant and a door switch preventing the evaporator fan from running while the refrigerator is open, they not only perform efficiently but also support a greener tomorrow.

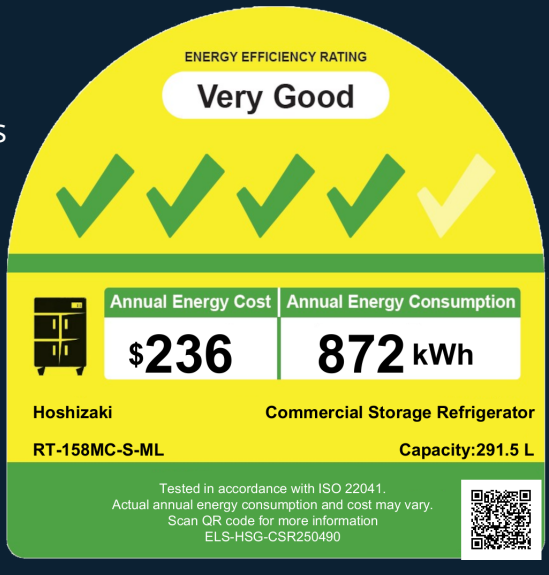

This model is compliant with NEA's **Mandatory Energy Labelling Scheme (MELS)** at **4 Tick.**

HOSHIZAKI

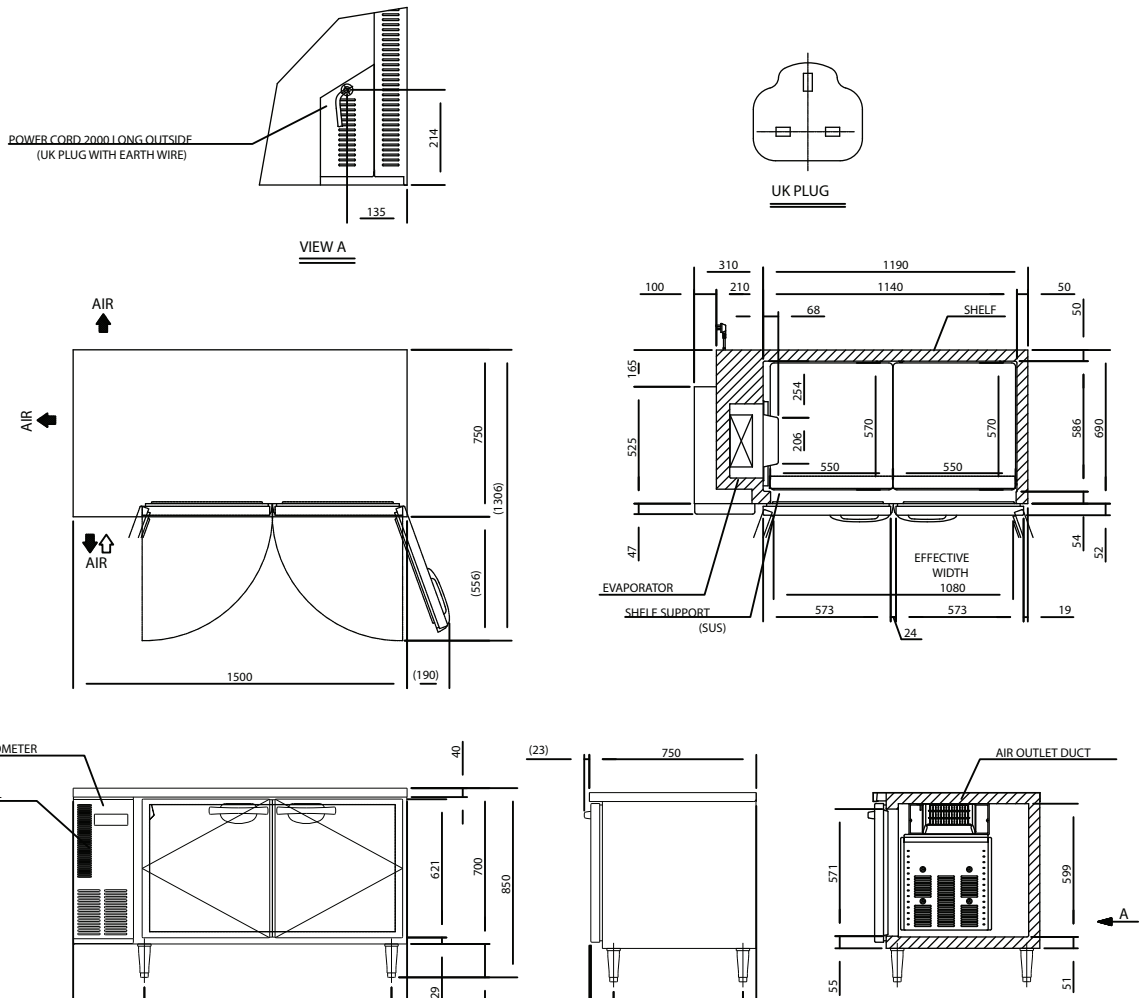

MODEL	RT-158MC-S-ML
POWER SUPPLY	1 Phase 220V~240V 50Hz / Capacity: 0.41kVA (1.86A)
ELECTRIC CONSUMPTION	Motor: 151W / Heater: 214W / Refrigeration: 175W / Defrost: 190W
ENERGY CONSUMPTION	1.98kWh / day (Based on ISO 22041-2019)
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12°C
EFFECTIVE CAPACITY	Net 291.5L / Gross 420L (Based on 22041-2019)
WEIGHT	Net: 94kg / Gross 106kg
OUTSIDE DIMENSIONS	1500mm(W)× 7500mm(D)×850(-880)mm(H)
PACKAGE	Carton (Wooden Pallet) 1565mm(W)×830mm(D)×845mm(H)
AMPERAGE	Rated 1.0A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%

HOSHIZAKI SINGAPORE PTE LTD

18 Boon Lay Way #01-102 , Tradehub 21 S609966

Tel: +65 6225 2612 Website: www.hoshizaki.com.sg